

FIBER OPTIC OUTDOOR FIBER OPTIC CABLE

OUTDOOR FIBER OPTIC CABLE IS A TYPE OF OPTICAL CABLE THAT IS SPECIFICALLY DESIGNED FOR OUTDOOR USE. IT IS TOUGH, CAN WITHSTAND WIND AND SUN EXPOSURE, AND HAS A ROBUST OUTER JACKET TO PROTECT THE CABLE.



FIBER CABLE 24 CORE MULTI MODE OM3 50/125 GYTS

NS-4030M3024

DESCRIPTION


- The fibers, 250µm, are positioned in a loose tube made of a high modulus plastic.
- The tubes are filled with a water-resistant Ring compound.
- A steel wire, sometimes sheathed with polyethylene (PE) for cable with high fiber count, locates in the center of core as a metallic strength member.
- Tubes (and fibers) are stranded around the strength member into a compact and circular cable core.
- The PSP is longitudinally applied over the cable core, which is filled with the Ring compound to protect it from water ingress.
- Then, the cable is completed with a PE sheath.

THE FOLLOWING MEASURES ARE TAKEN TO ENSURE THE CABLE WATERTIGHT:

- Steel wire used as the central strength member.
- Loose tube filling compound.
- 100% cable core filling.
- PSP enhancing moisture-proof.


FEATURES

- Good mechanical and temperature performance.
- High strength loose tube that is hydrolysis resistant.
- Special tube filling compound ensure a critical protection of fiber.
- Special designed compact structure is good at preventing loose tubes from shrinking.
- Crush resistance and flexibility.
- PE sheath protects cable from ultraviolet radiation.

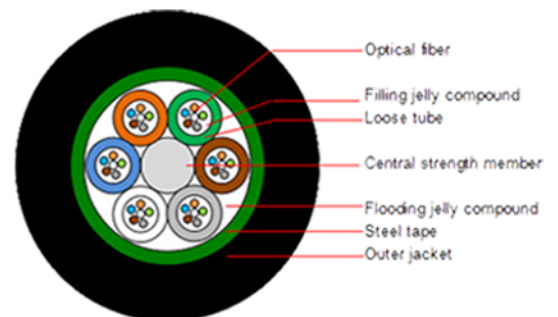

GYTS

TECHNICAL SPECIFICATION

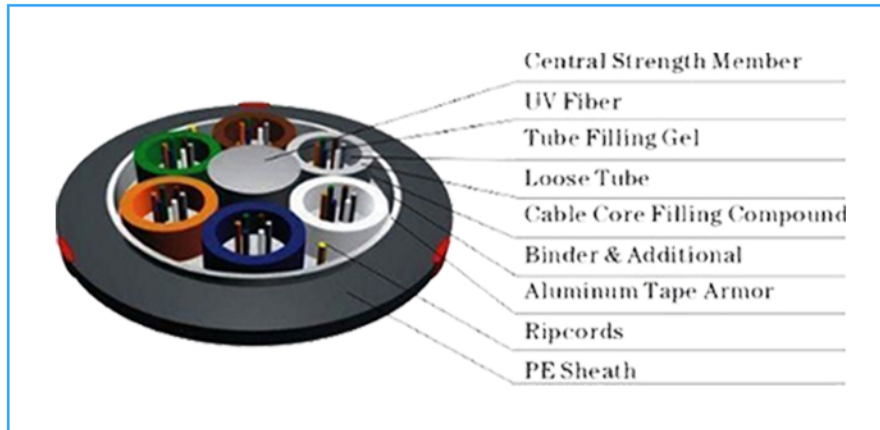

1. Technical Parameters

| Cable Type 2 (Increased by 2 bers) | Fiber Count | Tubes | Fillers | Cable Diameter (mm) | Cable Weight (kg/km) | Tensile Strength Long/Short term (N) | Crush Resistance Long/Short term (N/100mm) | Bending Radius Static/Dynamic (mm) |
|---------------------------------------|----------------|-------|---------|---------------------------|----------------------------|--|--|--|
| GYTS-2~6 | 2~6 | 1 | 4 | 9.5 | 100 | 600/1500 | 300/1000 | 10D/20D |
| GYTS-8~12 | 8~12 | 2 | 3 | 9.5 | 100 | 600/1500 | 300/1000 | 10D/20D |
| GYTS-14~18 | 14~18 | 3 | 2 | 9.5 | 100 | 600/1500 | 300/1000 | 10D/20D |
| GYTS-20~24 | 20~24 | 4 | 1 | 10.5 | 100 | 600/1500 | 300/1000 | 10D/20D |
| GYTS-26~30 | 26~30 | 5 | 0 | 10.5 | 100 | 600/1500 | 300/1000 | 10D/20D |
| GYTS-32~36 | 32~36 | 6 | 0 | 10.5 | 119 | 1000/3000 | 300/1000 | 10D/20D |
| GYTS-38~48 | 38~48 | 4 | 1 | 11.0 | 136 | 1000/3000 | 300/1000 | 10D/20D |
| GYTS-50~60 | 50~60 | 5 | 0 | 11.0 | 136 | 1000/3000 | 300/1000 | 10D/20D |
| GYTS-62~72 | 62~72 | 6 | 0 | 12.0 | 155 | 1000/3000 | 300/1000 | 10D/20D |
| GYTS-74~84 | 74~84 | 7 | 1 | 13.6 | 192 | 1000/3000 | 300/1000 | 10D/20D |
| GYTS-86~96 | 86~96 | 8 | 0 | 13.6 | 192 | 1000/3000 | 300/1000 | 10D/20D |
| GYTS-98~108 | 98~108 | 9 | 1 | 15.0 | 227 | 1000/3000 | 300/1000 | 10D/20D |
| GYTS-110~120 | 110~120 | 10 | 0 | 15.0 | 227 | 1000/3000 | 300/1000 | 10D/20D |
| GYTS-122~132 | 122~132 | 11 | 1 | 16.9 | 227 | 1000/3000 | 300/1000 | 10D/20D |
| GYTS-134~144 | 134~144 | 12 | 0 | 16.9 | 227 | 1000/3000 | 300/1000 | 10D/20D |

TECHNICAL SPECIFICATION

2. Optical Characteristics

| Characteristics | | Conditions | Specified values | Units |
|--|--------------------------------------|--|------------------|----------------------------|
| Attenuation | | 1310nm | ≤0.36 | [dB/km] |
| | | 1383nm(after H ₂ -aging) | ≤0.36 | [dB/km] |
| | | 1550nm | ≤0.22 | [dB/km] |
| | | 1625nm | ≤0.24 | [dB/km] |
| Attenuation vs. Wavelength Max. α difference | | 1285-1330nm, in reference to 1310nm | ≤0.03 | [dB/km] |
| | | 1525-1575nm, in reference to 1550nm | ≤0.02 | [dB/km] |
| Dispersion Coefficient | | 1285-1340nm | -3.5 to 3.5 | [ps/(nm·km)] |
| | | 1550nm | ≤18 | [ps/(nm·km)] |
| | | 1625nm | ≤22 | [ps/(nm·km)] |
| Zero Dispersion Wavelength(λ_0) | | -- | 1300-1324 | [nm] |
| Zero Dispersion Slope(S_0) | | -- | ≤0.092 | [ps/(nm ² ·km)] |
| Typical Value | | -- | 0.086 | [ps/(nm ² ·km)] |
| PMD | Maximum Individual Fibre | -- | ≤0.1 | [ps/√km] |
| | Link Design Value (M=20, Q=0.01%) | -- | ≤0.06 | [ps/√km] |
| | Typical Value | -- | 0.04 | [ps/√km] |
| Cable Cutoff Wavelength (λ_{cc}) | | -- | ≤1260 | [nm] |
| Mode Field Diameter (MFD) | | 1310nm | 8.7-9.5 | [μm] |
| | | 1550nm | 9.8-10.8 | [μm] |
| Effective Group Index of Refraction (N_{eff}) | | 1310nm | 1.466 | -- |
| | | 1550nm | 1.467 | -- |
| Point Discontinuities | | 1310nm | ≤0.05 | [dB] |
| | | 1550nm | ≤0.05 | [dB] |

3. Environmental Characteristics

| 1310nm, 1550nm & 1625nm | | | |
|--|---------------------------------|------------------|---------|
| Characteristics | Conditions | Specified values | Units |
| Temperature Dependence Induced Attenuation | -60°C to +85°C | ≤0.05 | [dB/km] |
| Temperature-Humidity Cycling Induced Attenuation | -10°C to +85°C, 98% RH | ≤0.05 | [dB/km] |
| Water Immersion Dependence Induced Attenuation | 23°C, for 30 days | ≤0.05 | [dB/km] |
| Damp Heat Dependence Induced Attenuation | 85°C and 85% RH, for 30 days | ≤0.05 | [dB/km] |
| Dry Heat Aging | 85°C, for 30 days | ≤0.05 | [dB/km] |

TECHNICAL SPECIFICATION

4. Geometrical Characteristics

| Characteristics | Conditions | Specified values | Units |
|--------------------------------------|------------|------------------|-----------|
| Cladding Diameter | -- | 125.0±0.7 | [μm] |
| Cladding Non-Circularity | -- | ≤1.0 | [%] |
| Coating Diameter | -- | 235-250 | [μm] |
| Coating-Cladding Concentricity Error | -- | ≤12.0 | [μm] |
| Coating Non-Circularity | -- | ≤6.0 | [%] |
| Core-Cladding Concentricity Error | -- | ≤0.6 | [μm] |
| Curl(radius) | -- | ≥4 | [m] |
| Delivery Length | -- | Up to 50.4 | [km/reel] |

5. Mechanical Specifications

| Characteristics | | Conditions | Specified values | Units |
|------------------------------------|--|-----------------------|------------------|--------|
| Proof Test | | -- | ≥9.0 | [N] |
| | | -- | ≥1.0 | [%] |
| | | -- | ≥100 | [kpsi] |
| Macro-bend Induced Attenuation | 100 Turns Around a Mandrel of 30 mm Radius | 1625nm | ≤0.05 | [dB] |
| | 100 Turns Around a Mandrel of 25 mm Radius | 1310nm and 1550nm | ≤0.05 | [dB] |
| | 1 Turn Around a Mandrel of 16 mm Radius | 1550nm | ≤0.05 | [dB] |
| Coating Strip Force | | typical average force | 1.5 | [N] |
| | | peak force | 1.3-8.9 | [N] |
| Dynamic Fatigue Parameter(n_d) | | -- | ≥20 | -- |

| Loose tube color: | | | | | | | | | Fiber color: | | | | | | | | |
|-------------------|------|--------|-------|-------|------|-------|-----|-------|--------------|------|--------|-------|-------|------|-------|-----|-------|
| NO. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | NO. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| Color | blue | orange | green | brown | gray | white | red | Black | Color | blue | orange | green | brown | gray | white | red | Black |

TECHNICAL SPECIFICATION

| | | | | | | | |
|----------------------------------|------------------------|---------|--|------|------|------|------|
| Fiber count | | / | 24 | 48 | 72 | 96 | 144 |
| Structure | | / | 1+6 | | | | |
| Fiber type | | / | G652D | | | | |
| Central strength en member | Material | mm | Steel | | | | |
| | OD (Average) | | 2.1±0.1 | | | | |
| Loose tube | Material | mm | PBT | | | | |
| | OD (Average) | | 2.1±0.1 | | | | |
| | Thickness (Average) | | 0.30±0.1 | | | | |
| | Fiber max/tube | | 12 | 12 | 12 | 12 | 12 |
| | Loose tube color | | Standard color | | | | |
| | Extra fiber length | % | 0.2~0.4 | | | | |
| Water blocking | Material | / | Flooding Compound+Water blocking tape+steel armor tape | | | | |
| Outer jacket | Material | | HDPE | | | | |
| | Thickness | mm | 2 | | | | |
| OD | | mm | 10.6 | 10.6 | 12.8 | 13.5 | 15.0 |
| Cable weight (Average) | | Kg/km | 100 | 100 | 110 | 120 | 140 |
| Tension strength | Long term | N | 600 | | | | |
| | Short term | | 1500 | | | | |
| Crush resistance | Long term | N/100mm | 300 | | | | |
| | Short term | | 1000 | | | | |
| Bending Ridus | Static | mm | 10D | | | | |
| | Dynamic | | 20D | | | | |
| Environment Temperature | Installation | °C | -30/+60 | | | | |
| | Operation | | -40/+70 | | | | |