

# FIBER OPTIC OUTDOOR FIBER OPTIC CABLE

OUTDOOR FIBER OPTIC CABLE IS A TYPE OF OPTICAL CABLE THAT IS SPECIFICALLY DESIGNED FOR OUTDOOR USE. IT IS TOUGH, CAN WITHSTAND WIND AND SUN EXPOSURE, AND HAS A ROBUST OUTER JACKET TO PROTECT THE CABLE.



## FIBER CABLE 36 CORE SINGLE MODE OS2 9/125 GYTS

**NS-401SM036**

### DESCRIPTION


- The bers, 250µm, are positioned in a loose tube made of a high modulus plastic.
- The tubes are lled with a water-resistant Ring compound.
- A steel wire, sometimes sheathed with polyethylene (PE) for cable with high fiber count, locates in the center of core as a metallic strength member.
- Tubes (and Hers) are stranded around the strength member into a compact and circular cable core.
- The PSP is longitudinally applied over the cable core, witch is fllid with the Ring compound to protect it from water ingress.
- Then, the cable is completed with a PE sheath.

### THE FOLLOWING MEASURES ARE TAKEN TO ENSURE THE CABLE WATERTIGHT:

- Steel wire used as the central strength member.
- Loose tube filling compound.
- 100% cable core filling .
- PSP enhancing moisture-proof.


### FEATURES

- Good mechanical and temperature performance.
- High strength loose tube that is hydrolysis resistant.
- Special tube filling compound ensure a critical protection of fiber.
- Special designed compact structure is good at preventing loose tubes from shrinking.
- Crush resistance and flexibility.
- PE sheath protects cable from ultraviolet radiation.

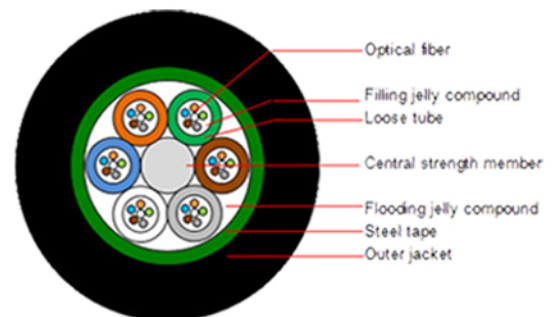

**GYTS**

# TECHNICAL SPECIFICATION

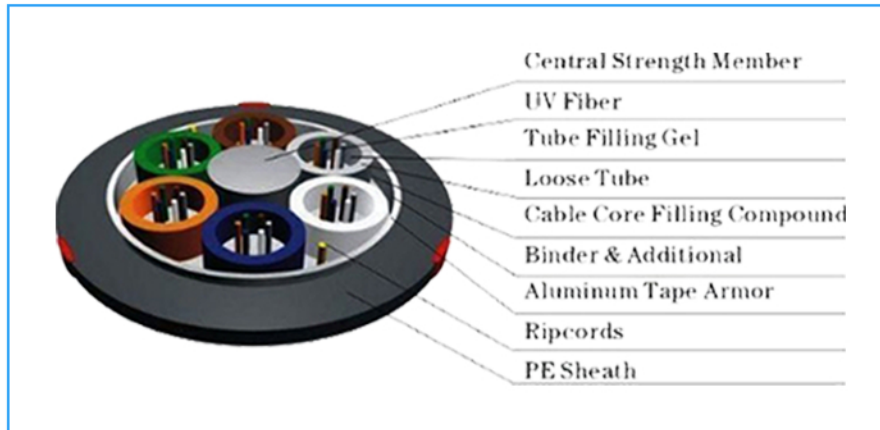

## 1. Technical Parameters

| Cable Type 2<br>(Increased by 2 bers) | Fiber<br>Count | Tubes | Fillers | Cable<br>Diameter<br>(mm) | Cable<br>Weight<br>(kg/km) | Tensile Strength<br>Long/Short term<br>(N) | Crush Resistance<br>Long/Short term<br>(N/100mm) | Bending Radius<br>Static/Dynamic<br>(mm) |
|---------------------------------------|----------------|-------|---------|---------------------------|----------------------------|--|--|--|
| GYTS-2~6                              | 2~6            | 1     | 4       | 9.5                       | 100                        | 600/1500                                   | 300/1000   | 10D/20D                                  |
| GYTS-8~12                             | 8~12           | 2     | 3       | 9.5                       | 100                        | 600/1500                                   | 300/1000   | 10D/20D                                  |
| GYTS-14~18                            | 14~18          | 3     | 2       | 9.5                       | 100                        | 600/1500                                   | 300/1000   | 10D/20D                                  |
| GYTS-20~24                            | 20~24          | 4     | 1       | 10.5                      | 100                        | 600/1500                                   | 300/1000   | 10D/20D                                  |
| GYTS-26~30                            | 26~30          | 5     | 0       | 10.5                      | 100                        | 600/1500                                   | 300/1000   | 10D/20D                                  |
| GYTS-32~36                            | 32~36          | 6     | 0       | 10.5                      | 119                        | 1000/3000                                  | 300/1000   | 10D/20D                                  |
| GYTS-38~48                            | 38~48          | 4     | 1       | 11.0                      | 136                        | 1000/3000                                  | 300/1000   | 10D/20D                                  |
| GYTS-50~60                            | 50~60          | 5     | 0       | 11.0                      | 136                        | 1000/3000                                  | 300/1000   | 10D/20D                                  |
| GYTS-62~72                            | 62~72          | 6     | 0       | 12.0                      | 155                        | 1000/3000                                  | 300/1000   | 10D/20D                                  |
| GYTS-74~84                            | 74~84          | 7     | 1       | 13.6                      | 192                        | 1000/3000                                  | 300/1000   | 10D/20D                                  |
| GYTS-86~96                            | 86~96          | 8     | 0       | 13.6                      | 192                        | 1000/3000                                  | 300/1000   | 10D/20D                                  |
| GYTS-98~108                           | 98~108         | 9     | 1       | 15.0                      | 227                        | 1000/3000                                  | 300/1000   | 10D/20D                                  |
| GYTS-110~120                          | 110~120        | 10    | 0       | 15.0                      | 227                        | 1000/3000                                  | 300/1000   | 10D/20D                                  |
| GYTS-122~132                          | 122~132        | 11    | 1       | 16.9                      | 227                        | 1000/3000                                  | 300/1000   | 10D/20D                                  |
| GYTS-134~144                          | 134~144        | 12    | 0       | 16.9                      | 227                        | 1000/3000                                  | 300/1000   | 10D/20D                                  |

# TECHNICAL SPECIFICATION

## 2. Optical Characteristics

| Characteristics                                      |                                      | Conditions                             | Specified values | Units                      |
|--|--------------------------------------|--|------------------|----------------------------|
| Attenuation  |                                      | 1310nm                                 | ≤0.36            | [dB/km]                    |
|  |                                      | 1383nm(after H <sub>2</sub> -aging)    | ≤0.36            | [dB/km]                    |
|  |                                      | 1550nm                                 | ≤0.22            | [dB/km]                    |
|  |                                      | 1625nm                                 | ≤0.24            | [dB/km]                    |
| Attenuation vs. Wavelength<br>Max. α difference      |                                      | 1285-1330nm, in reference to<br>1310nm | ≤0.03            | [dB/km]                    |
|  |                                      | 1525-1575nm, in reference to<br>1550nm | ≤0.02            | [dB/km]                    |
| Dispersion Coefficient                               |                                      | 1285-1340nm                            | -3.5 to 3.5      | [ps/(nm·km)]               |
|  |                                      | 1550nm                                 | ≤18              | [ps/(nm·km)]               |
|  |                                      | 1625nm                                 | ≤22              | [ps/(nm·km)]               |
| Zero Dispersion Wavelength( $\lambda_0$ )            |                                      | --                                     | 1300-1324        | [nm]                       |
| Zero Dispersion Slope( $S_0$ )                       |                                      | --                                     | ≤0.092           | [ps/(nm <sup>2</sup> ·km)] |
| Typical Value  |                                      | --                                     | 0.086            | [ps/(nm <sup>2</sup> ·km)] |
| PMD  | Maximum Individual Fibre             | --                                     | ≤0.1             | [ps/√km]                   |
|  | Link Design Value (M=20,<br>Q=0.01%) | --                                     | ≤0.06            | [ps/√km]                   |
|  | Typical Value                        | --                                     | 0.04             | [ps/√km]                   |
| Cable Cutoff Wavelength ( $\lambda_{cc}$ )           |                                      | --                                     | ≤1260            | [nm]                       |
| Mode Field Diameter (MFD)                            |                                      | 1310nm                                 | 8.7-9.5          | [μm]                       |
|  |                                      | 1550nm                                 | 9.8-10.8         | [μm]                       |
| Effective Group Index of Refraction<br>( $N_{eff}$ ) |                                      | 1310nm                                 | 1.466            | --                         |
|  |                                      | 1550nm                                 | 1.467            | --                         |
| Point Discontinuities                                |                                      | 1310nm                                 | ≤0.05            | [dB]                       |
|  |                                      | 1550nm                                 | ≤0.05            | [dB]                       |

## 3. Environmental Characteristics

| 1310nm, 1550nm & 1625nm                          |                                 |                  |         |
|--|---------------------------------|------------------|---------|
| Characteristics                                  | Conditions                      | Specified values | Units   |
| Temperature Dependence Induced Attenuation       | -60°C to +85°C                  | ≤0.05            | [dB/km] |
| Temperature-Humidity Cycling Induced Attenuation | -10°C to +85°C, 98% RH          | ≤0.05            | [dB/km] |
| Water Immersion Dependence Induced Attenuation   | 23°C, for 30 days               | ≤0.05            | [dB/km] |
| Damp Heat Dependence Induced Attenuation         | 85°C and 85% RH, for<br>30 days | ≤0.05            | [dB/km] |
| Dry Heat Aging                                   | 85°C, for 30 days               | ≤0.05            | [dB/km] |

# TECHNICAL SPECIFICATION

## 4. Geometrical Characteristics

| Characteristics                      | Conditions | Specified values | Units     |
|--------------------------------------|------------|------------------|-----------|
| Cladding Diameter                    | --         | 125.0±0.7        | [µm]      |
| Cladding Non-Circularity             | --         | ≤1.0             | [%]       |
| Coating Diameter                     | --         | 235-250          | [µm]      |
| Coating-Cladding Concentricity Error | --         | ≤12.0            | [µm]      |
| Coating Non-Circularity              | --         | ≤6.0             | [%]       |
| Core-Cladding Concentricity Error    | --         | ≤0.6             | [µm]      |
| Curl(radius)                         | --         | ≥4               | [m]       |
| Delivery Length                      | --         | Up to 50.4       | [km/reel] |

## 5. Mechanical Specifications

| Characteristics                    |  | Conditions            | Specified values | Units  |
|------------------------------------|--|-----------------------|------------------|--------|
| Proof Test                         |  | --                    | ≥9.0             | [N]    |
|                                    |  | --                    | ≥1.0             | [%]    |
|                                    |  | --                    | ≥100             | [kpsi] |
| Macro-bend Induced Attenuation     | 100 Turns Around a Mandrel of 30 mm Radius | 1625nm                | ≤0.05            | [dB]   |
|                                    | 100 Turns Around a Mandrel of 25 mm Radius | 1310nm and 1550nm     | ≤0.05            | [dB]   |
|                                    | 1 Turn Around a Mandrel of 16 mm Radius    | 1550nm                | ≤0.05            | [dB]   |
| Coating Strip Force                |  | typical average force | 1.5              | [N]    |
|                                    |  | peak force            | 1.3-8.9          | [N]    |
| Dynamic Fatigue Parameter( $n_d$ ) |  | --                    | ≥20              | --     |

| Loose tube color: |      |        |       |       |      |       |     |       | Fiber color: |      |        |       |       |      |       |     |       |
|-------------------|------|--------|-------|-------|------|-------|-----|-------|--------------|------|--------|-------|-------|------|-------|-----|-------|
| NO.               | 1    | 2      | 3     | 4     | 5    | 6     | 7   | 8     | NO.          | 1    | 2      | 3     | 4     | 5    | 6     | 7   | 8     |
| Color             | blue | orange | green | brown | gray | white | red | Black | Color        | blue | orange | green | brown | gray | white | red | Black |

# TECHNICAL SPECIFICATION

|                                  |                        |         |  |      |      |      |      |
|----------------------------------|------------------------|---------|--|------|------|------|------|
| Fiber count                      |                        | /       | 24   | 48   | 72   | 96   | 144  |
| Structure                        |                        | /       | 1+6  |      |      |      |      |
| Fiber type                       |                        | /       | G652D  |      |      |      |      |
| Central strength<br>en<br>member | Material               | mm      | Steel  |      |      |      |      |
|                                  | OD<br>(Average)        |         | 2.1±0.1  |      |      |      |      |
| Loose<br>tube                    | Material               | mm      | PBT  |      |      |      |      |
|                                  | OD<br>(Average)        |         | 2.1±0.1  |      |      |      |      |
|                                  | Thickness<br>(Average) |         | 0.30±0.1   |      |      |      |      |
|                                  | Fiber<br>max/tube      |         | 12   | 12   | 12   | 12   | 12   |
|                                  | Loose tube<br>color    |         | Standard color   |      |      |      |      |
|                                  | Extra fiber<br>length  | %       | 0.2~0.4  |      |      |      |      |
| Water<br>blocking                | Material               | /       | Flooding Compound+Water blocking tape+steel armor tape |      |      |      |      |
| Outer<br>jacket                  | Material               |         | HDPE   |      |      |      |      |
|                                  | Thickness              | mm      | 2  |      |      |      |      |
| OD                               |                        | mm      | 10.6   | 10.6 | 12.8 | 13.5 | 15.0 |
| Cable weight (Average)           |                        | Kg/km   | 100  | 100  | 110  | 120  | 140  |
| Tension<br>strength              | Long term              | N       | 600  |      |      |      |      |
|                                  | Short term             |         | 1500   |      |      |      |      |
| Crush<br>resistance              | Long term              | N/100mm | 300  |      |      |      |      |
|                                  | Short term             |         | 1000   |      |      |      |      |
| Bending<br>Ridus                 | Static                 | mm      | 10D  |      |      |      |      |
|                                  | Dynamic                |         | 20D  |      |      |      |      |
| Environment<br>Temperature       | Installation           | °C      | -30/+60  |      |      |      |      |
|                                  | Operation              |         | -40/+70  |      |      |      |      |