

## RACKS

# DOUBLE OPEN RACK

OPEN FRAME RACKS ARE DESIGNED FOR A PROFESSIONAL CABLE MANAGEMENT IN PROTECTED DATA CENTER ROOMS. SPECIAL CABLING SECTIONS ON THE LEFT AND RIGHT SIDE PROVIDE A FLEXIBLE AND PROPER CABLE MANAGEMENT.



## DOUBLE OPEN RACK 42U 60\*60

## NS-504DOR42U6060

### FEATURES

- Modular design, easily assembled and disassembled for delivery, low-cost.
- Various optional accessories according to requirements (fish bone type cable management slot, removable working panel, etc.).
- The depth could be adjustable 600-960mm.
- Can be bolted directly to floor.
- Maximum access for cable management and equipment maintenance.
- Flexible packing methods allows for convenient stocking and end user delivery.
- Multiple sizes available.
- Customization requests welcome.

### COLOR

- Body color:RAL9004(black). ■

### STANDARD AND MATERIAL

Comply with

- ANSI/EIA; RS-310-D; IEC297-2; DIN41491:PART1; DIN41494:PART7; GB/T3047.2-92 standard.
- 19" international standard, metric system and ETSI standard.

### SURFACE TREATMENT

- Degreasing, pickling, phosphating, powder coating.

### MATERIAL

- SPCC cold rolled steel.


### THICKNESS

- 2.0mm, front and bottom mounting angle:2.0mm; the mounting profiles:2.0mm

### LOADING WEIGHT

- Static loading: 200KG, Height available from 27U to 42U.

# TECHNICAL SPECIFICATION

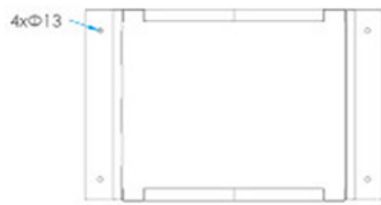

Model	U	Width	Depth	Height
NS-504DOR27U6060	27	600	600	1331
NS-504DOR27U60100			1000	
NS-504DOR32U6060	32		600	1553
NS-504DOR32U60100			1000	
NS-504DOR37U6060	37		600	1775
NS-504DOR37U60100			1000	
NS-504DOR42U6060	42		600	1998
NS-504DOR42U60100			1000	

