

## RACKS

# WALL MOUNT SLIM CABINET

SLIM AND STYLISH CABINETS DESIGNED FOR USE IN AREAS WITH AESTHETIC IMPORTANCE AND LIMITED SPACE. THE SLIM DESIGN ALLOWS THESE CABINETS TO PROTECT COMMUNICATION EQUIPMENT WITHOUT DISRUPTING THE VISUAL ORDER OF THE SPACE.




## WALL MOUNT SLIM CABINET 3U

**NS-501SR3U5048**

### FEATURES

- Slim Cabinets are network distribution cabinets, suitable for 19" devices which are installable on the wall, on the floor or at the ceiling in places where easy access and decorative appearance is of importance.
- Thanks to its high resistance frame structure, it presents high capacity of protection and carriage as required by the devices there in.
- It presents an internal volume sufficient for all cabling requirements of (3U+5U)8U network equipment that might be housed at maximum.
- In total 3, breakable rectangular cable holes- 2 for 70mmx100mm and 1 for 50mmx 100mm- are provided for multicable inlets.
- In case of intense cabling, it enables easy and ordered organization of the cables thanks to the frequent slots and nails.
- It allows the door to be fixed during the application there by providing a peaceful work space thanks to its high resistance hinge system and mechanical stopper of the front cover.
- Saves space where installed with 146mm height.
- It adds prestige to the places where installed with easy access, reduced bulk and professional appearance compared to the conventional cabinet structures.
- By means of its widely opening upper cover it enables access to the devices therein from the front, rear and sides.
- As delivered mounted, one-piece, it may be readily put into use without need of an installation.

# TECHNICAL SPECIFICATION

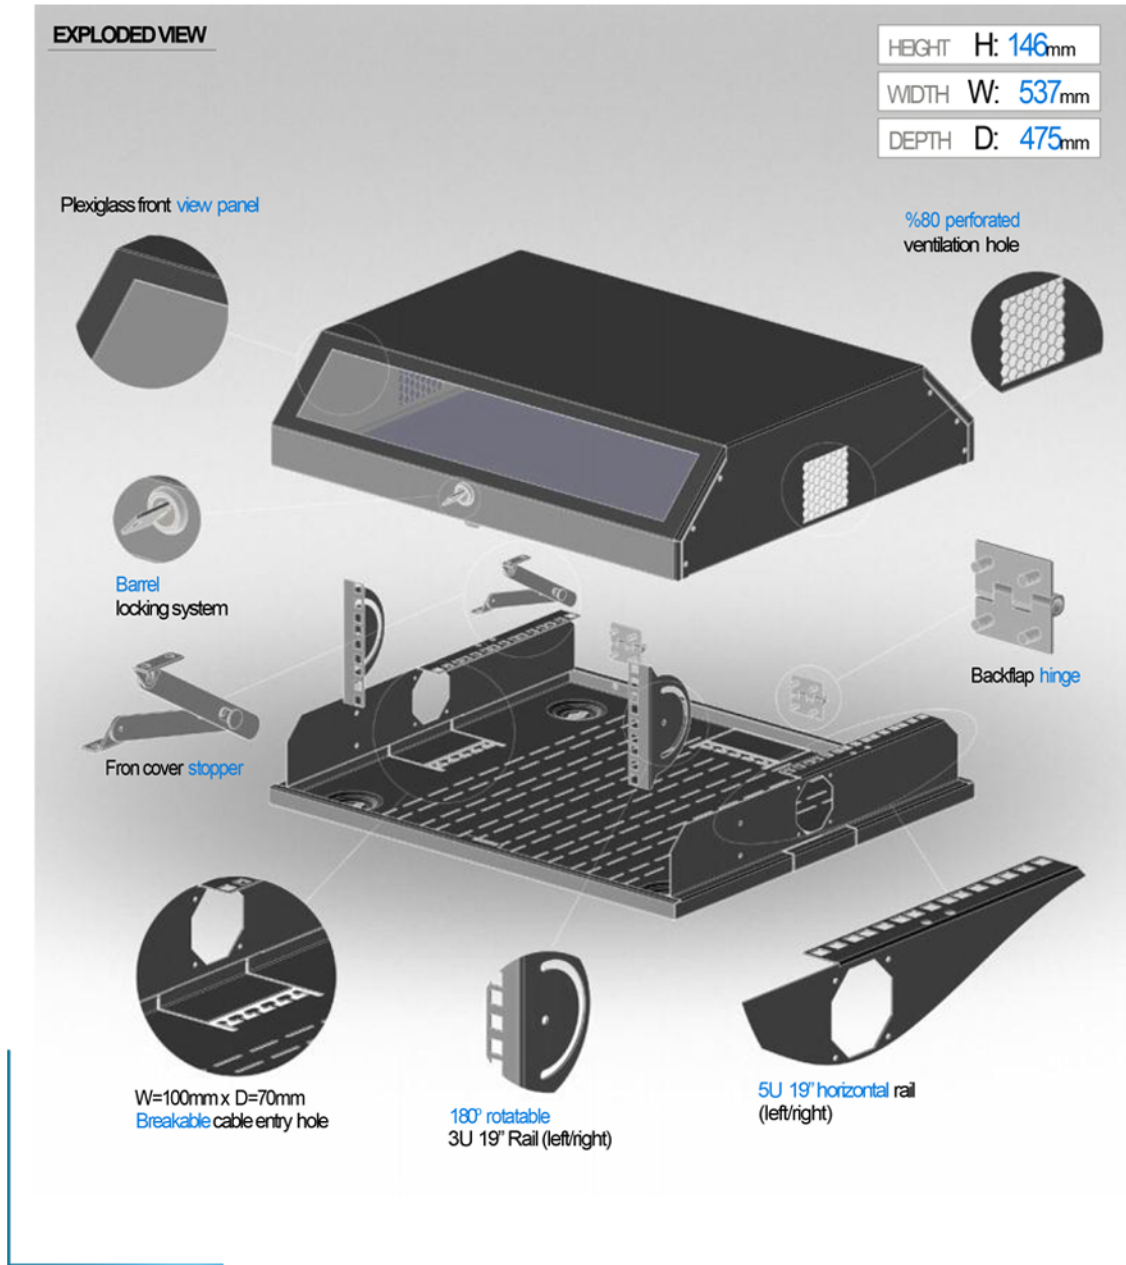


## SLIM 19" WALL TYPE CABINET W=537mm D=475mm

Product Code	Product Description	U Usage	Product Dimensions WxDxH (mm)	Width Between Rails	Package Dimensions WxDxH (mm)	Number in the Package (pcs)	Product Net Weight (kg)	Product Weight (kg)	Number on the Pallet (pcs)	Pallet Dimension WxDxH (mm)	Pallet Weight (kg)
MRSUMXX	3U+5U=8UW=537mmD=475mmSLIM Cabinet	3U+5U	537x475x146	19"	560x495x165	1	8,1	8,8	40	1200x1000x1920	390


XX= Color Code, 02 means LightGrey RAL 7035 and 01 means Black RAL 9005, the code is added by the customer at the order.

# TECHNICAL SPECIFICATION

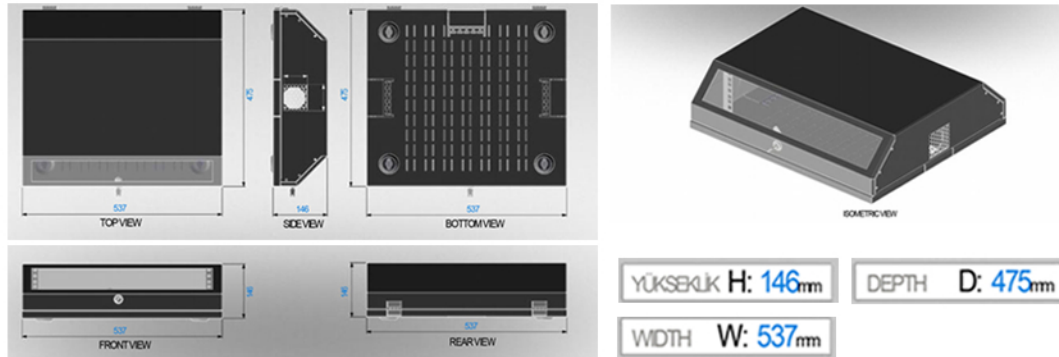


## 3U STRAIGHT VERTICAL & 5U HORIZONTAL USE

3U movable rail may be placed 180° horizontally enabling a device of 8U length in total and 80mm depth to be attached thereon. It is preferred when employing low depth, high U devices.

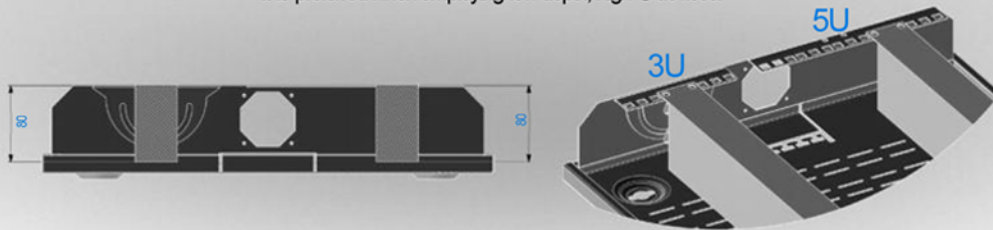

## 3U STRAIGHT & 5U HORIZONTAL USE

3U movable rail may be given 135° angled position enabling devices of 3U length in total and 50mm to 140mm depth to be attached thereon. Plexiglas front panels are preferred in order to monitor attached devices without opening the cover of the cabinet. To the fixed 5U devices rails, a device of 4U length in total and 80mm depth may be attached.

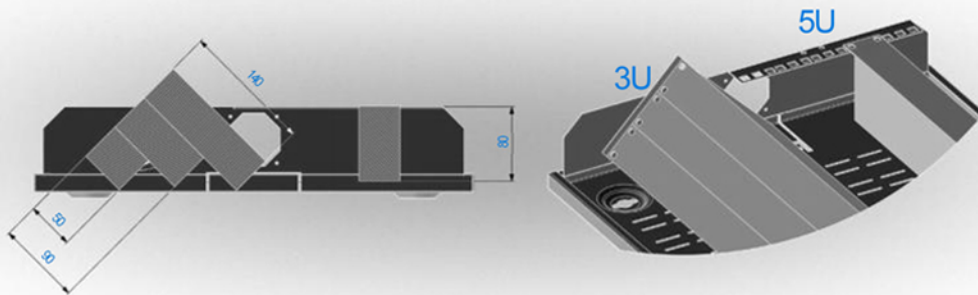


# TECHNICAL SPECIFICATION



## WIDE CABLING AREA

In case of intense cabling, it enables easy and ordered organization of the cables thanks to the frequent slots and nails.

In total 3, breakable rectangular cable holes - 2 for 70mm x 100mm and 1 for 50mm x 100mm - are provided for multi cable inlets.

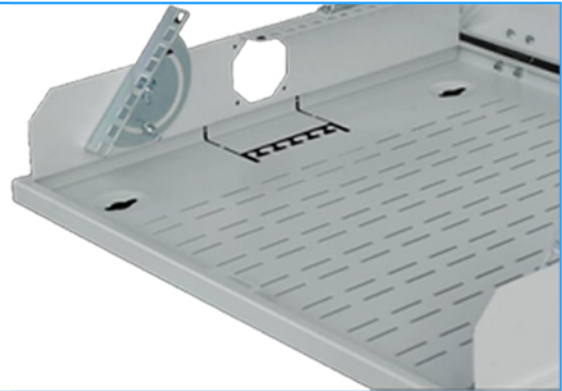

## EASY ACCESS

By means of its widely opening upper cover it enables access to the devices therein from the front, rear and sides.




## ONE-PIECE MOUNTED STRUCTURE

As delivered mounted, one-piece, it may be readily put into use without need of an installation.

# TECHNICAL SPECIFICATION


## 3U STRAIGHT VERTICAL & 5U HORIZONTAL USE (1)

3U movable rail may be given 90° straight angled position enabling devices of 3U length in total and 300mm to 360mm depth to be attached thereon. Rear rails are not used in this configuration.

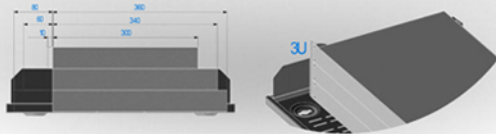



## 3U STRAIGHT & 5U HORIZONTAL USE (2)

3U movable rail may be given 90° straight angled position enabling devices of 110mm depth to be attached thereon. To the fixed 5U devices rails, a device of 5U length in total and 80mm depth may be attached.

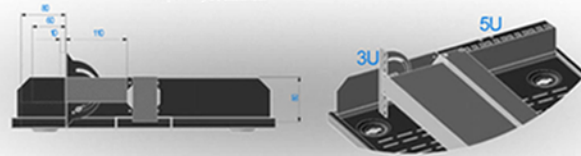

## 3U INVERTED VERTICAL & 5U HORIZONTAL USE (1)

3U movable rail may be given 270° straight angled position enabling devices of 3U length in total and 250mm to 320mm depth to be attached thereon. This is preferred when forward distances of the devices are high (between 50 mm and 125 mm); rear rails are not used in this configuration.

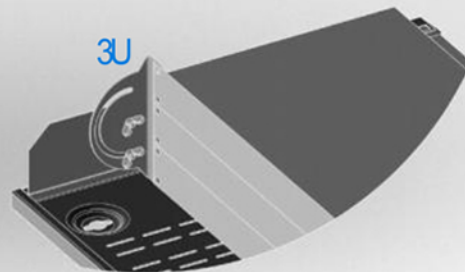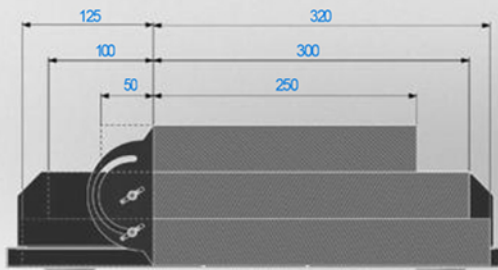

## 3U INVERTED VERTICAL & 5U HORIZONTAL USE (2)

If a device of 70mm depth is attached to the 3U rails, rear fixed 5U rails may house a device of 5U length in total and 80mm depth.

